## **TURBO LIQUIDISER TRX-21**

1-speed turbo-mixer.







- Standard 30D multi-use attachment
- √ 42D attachment for very fine blending
- Safety microswitch to control the work position: prevents the turbine working if the arm is too high or low.
- Safety guard on the liquidiser head and safety device that cuts out the power supply.

#### **INCLUDES**

√ Trolley, motor and arm (without) attachments).

## **OPTIONAL**

- 21D attachment for fibrous ingredients.
- Standard 30D attachment for
- general use.
- 42D attachment for very fine blending.

## **Accessories**

□ Grids for TRX

## **SPECIFICATIONS**

Maximum recipient capacity: 800 l

Liquidising arm length: 600 mm Max. grid diameter: 288 mm

Total loading: 2200 W Speed (in liquid): 1500 rpm

#### External dimensions (W x D x H)

- √ Width: 568 mm
- ✓ Depth: 1643 mm (963 mm)
- √ Height: 1219 mm (1651 mm)

Net weight: 96 kg

Noise level (1m.): <70 dB(A) Background noise: 32 dB(A)

### **Crated dimensions**

1030 x 710 x 1840 mm

# AVAILABLE MODELS

3030501 Turbo liquidiser TRX-21 230-400/50/3N

3030502 Turbo liquidiser TRX-21 220-380/60/3N

3030509 Turbo liquidiser TRX-21 230-400/50/3N (by air)

3030511 Turbo liquidiser TRX-21 220-380/60/3N (by air)

\* Ask for special versions availability

# SALES DESCRIPTION

Turbo-blender designed to work in up to 800 litre / 130 gal. bowls.


3-phase only.


- √ Fully manufactured in stainless steel 18/10.
- ✓ For mixing and liquidising directly in the pot or pan for making consommés, soups, omelettes, mayonnaise, etc.
- Designed for large yields and for frequent use and cleaning, ideal for kitchens with a large production and the food industry.
- ✓ Ease of use: can be moved in several directions, adjustable height, fitted on a trolley with 4 non-slip rubber wheels, 2 of them with brakes
- √ Arm: 600 mm long for blending in any type of cooking pot, whether round or rectangular, equally effective throughout the whole pot.
- Balanced liquidiser arm: stops the arm falling or tipping back when not locked.
- ✓ Arm securing lever: allows you to lock the blender with one hand while holding the trolley with the other.
- √ Watertight, tilted control panel: easy access even during use.
- Control panel located on the trolley, making the arm more agile, with better mobility.
- Control panel with built-in timer: you can leave the machine running for up to 60 minutes without the need for user involvement.
- √ Wiring incorporated into the trolley tubes: The work area is free of cables, so as not to hinder the movement of the blender arm.
- ✓ Supports for storing the power supply cable: prevents the cable getting tangled and inconveniencing other users.
- √ The turbine, disc and grille are very easy to remove for cleaning: no tools needed.
- √ The turbine, guard, disc and attachment can be cleaned in dishwas-
- √ For use with 3 easily interchangeable attachments, which meet the needs of all users and ingredients. 21D for fibrous ingredients








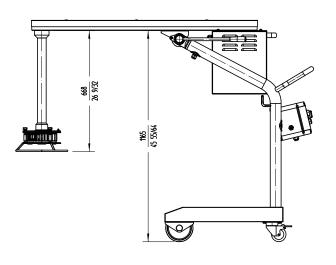

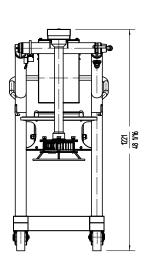

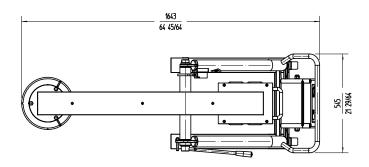



### www.sammic.co.uk

Food Service Equipment Manufacturer Unit 2, Trevanth Road Troon Industrial Park

LE4 9LS - Leicester

uksales@sammic.com Tel.: +44 0116 246 1900



Project	Date
Item	Qty

Approved