
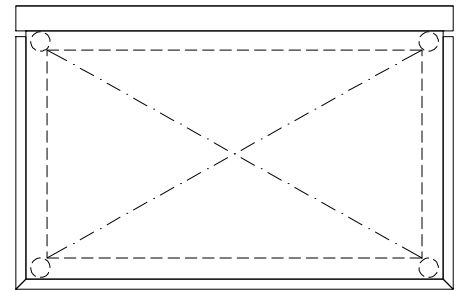


Twin Pass Through Utensil Washer with Drain Heat Recovery

UXTHR-10B

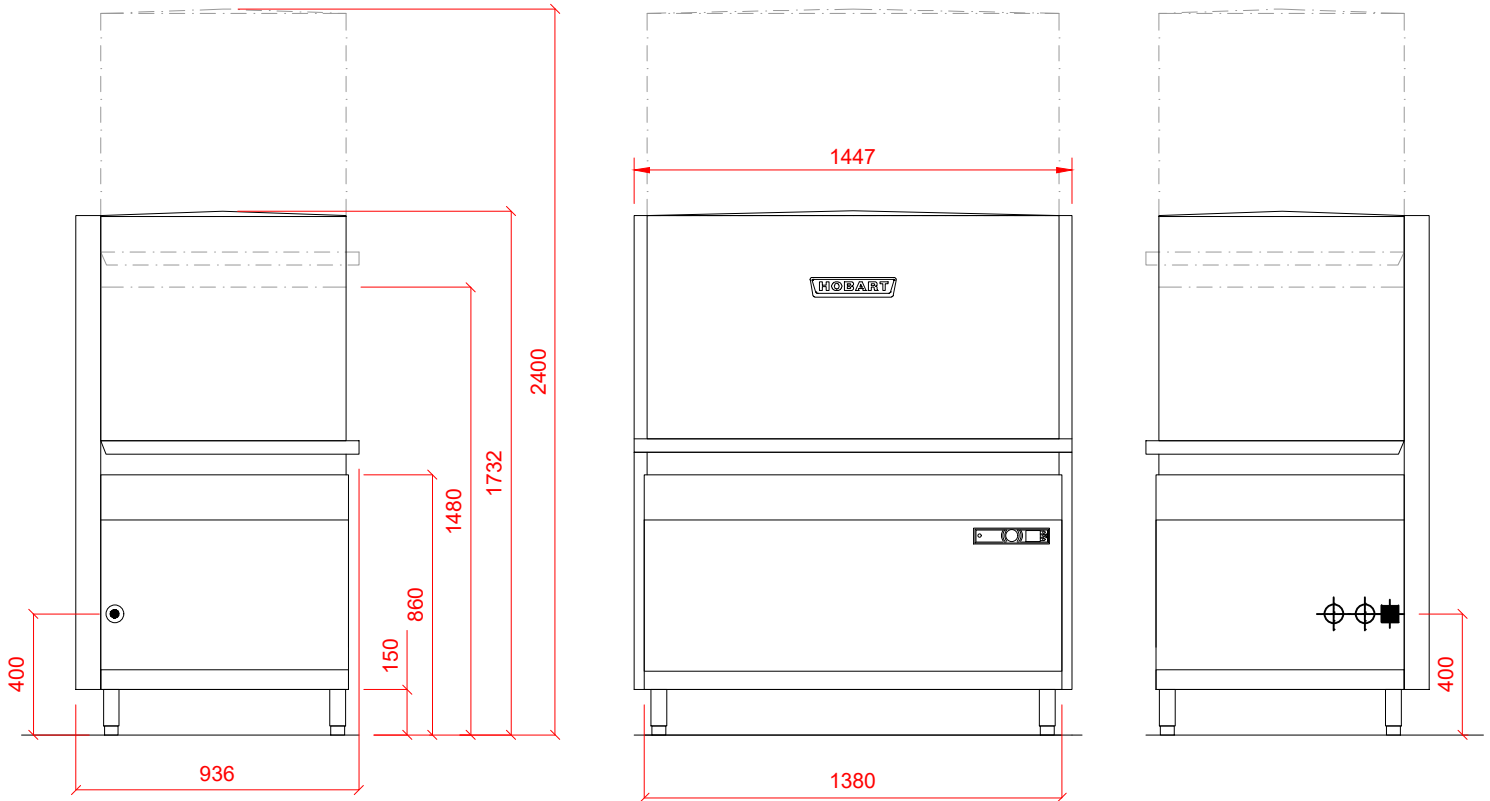

Plan View

<p>1 Water </p> <p>22mm CONNECTION VIA 1.5 METRE FLEXIBLE HOSE, FEMALE TERMINATION.</p> <p>WATER SUPPLY 15°C TO 60°C (2° TO 8° CLARK MAX) @ 0.5 TO 10 BAR MAX. INITIAL TANK FILL 130 LITRES. RINSE WATER USAGE 6.9 LITRES PER RACK CYCLE. MAX USAGE 207 LITRES PER HOUR. OUR MACHINES ARE SUPPLIED WITH CLASS 'AB' AIR GAP AS STANDARD. WATER SUPPLY TO HAVE INDEPENDENT ISOLATING VALVE.</p>	<p>2 Drain </p> <p>DRAIN - 2 METRE FLEXIBLE HOSE TO A 40 mm TRAPPED STANDPIPE 800mm A.F.F.L.</p> <p>FLOW RATE 30 LITRES PER MINUTE.</p> <p>Other Services</p>	<p>3 Electric </p> <p>20.6kW 400/50/3 + N + E FUSED AT 35amps CONFIGURABLE TO: 15.5kW 400/50/3 + N + E FUSED AT 25amps 26.6kW 400/50/3 + N + E FUSED AT 50amps</p> <p>MACHINE SUPPLIED WITH 1.8 METRES OF CABLE.</p> <p>Notes</p> <p>APPROX WEIGHTS: EMPTY: 364kg's HEIGHTS MARKED * REPRESENT ±25mm OPERATING HEIGHT FOR TABLE: 860mm</p>
--	---	--

PLOT SCALE: 1:25

RIGHT TO MAKE NECESSARY CHANGES IS RESERVED